


### Long proven ELDAN Pre-Chopping Technology

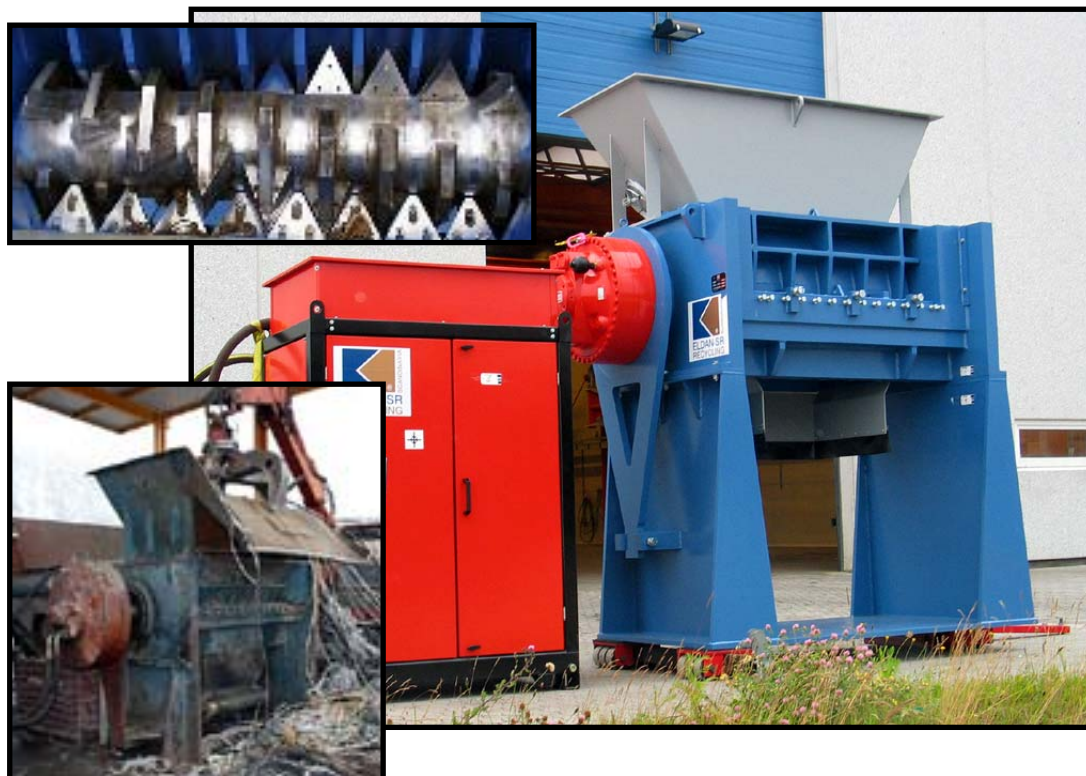

**- Simple to operate - Difficult to damage - Simple and inexpensive to maintain**

The multifunctional Super Choppers process most non-ferrous materials and tyres.

Unique single rotor design.

Low speed, high torque rotor.

Powered directly by a Hägglund hydraulic motor and power unit.

Automatic reverse for overload protection.

Large triangular knives are resistant to cracking or breaking.

Adjustable knife clearance.

Knives available in different steel qualities providing the optimum solution for processing of your specific material.

Special tool-steel knives can be reground multiple times on a »flat-bed« grinder to ensure long life and low operating costs.

Starts when fully loaded with material.

Inlet hopper with large opening enabling very easy grab loading.

Reliable After-Sales-Service.

**ELDAN RECYCLING A/S - Your logical choice of Partner**

**ELDAN RECYCLING A/S**

Phone: +45 6361 2545, Fax: +45 6361 2540

Website: [www.eldan-recycling.com](http://www.eldan-recycling.com)

# Technical Specifications



Specifications	SC1408/90	SC1412/160	SC2118/250
Motor ****	90 kW	160 kW	250 kW
Power *	3 x 400 V - 50 Hz	3 x 400 V - 50 Hz	3 x 400 V - 50 Hz
Rotor	1400 mm/22 rpm	1400 mm/22 rpm	2100 mm/23 rpm
Knives	8 flying/5 static	12 flying/7 static	18 flying/10 static
Hägglund motor****	CB280	CB400	CB560
Capacity hour**	Up to 5-10 ton/hour	Up to 5-12 ton/hour	Up to 12-20 ton/hour
Weight***	Approx. 12000 kg	Approx. 13000 kg	Approx. 26000 kg
Dimensions***	Length: 2200 mm Height: 3500 mm Width: 3000 mm	Length: 2200 mm Height: 3500 mm Width: 3000 mm	Length: 1800 mm Height: 3850 mm Width: 4000 mm

\* Standard voltage (by other voltages, please contact our Sales Department)

\*\* Depending on input material

\*\*\* Excluding Power Pack

\*\*\*\* Standard (other combinations available upon request)

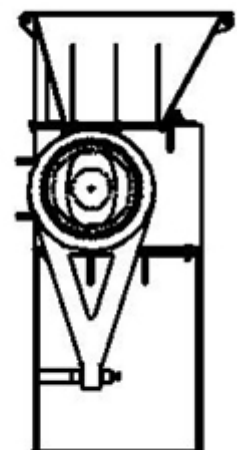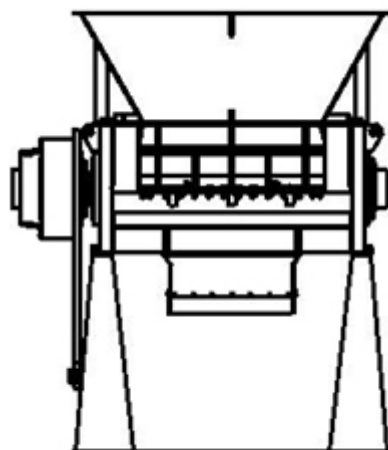

*We reserve the right to alter and modify technical specifications and design without further notice*